

EZ LOCK & ACCESSORIES INSTALLATION & INSTRUCTIONS



Model TL-50



Install TL-50 narrow end (looks like a goose's neck) over handle of coupler. Bring the wide opening of the TL-50 into position over the wide part of the coupler. Insert pin in the hole that gives maximum tightness. The TL-50 fits most Hammerblow, Stallion, Superior, and T.E.M. Gooseneck style couplers. Strong construction – will not rust. Uses $\frac{3}{4}$ " steel locking pin.

Model TL-53 consists of TL-50, TL-51 and two TL-45s.

Patent No. 402602

Model TL-51



Fits all gooseneck style adjustable round or square tube design. Four parts in kit: bolt cover, steel pin, washer and spacer. Place washer behind lock nut and tighten, then slip TL-51 into place over washer. Insert pin and lock with large model TL-45 padlock. The spacer is only required on Hammerblow square model HBQ2516ADJ.

Model TL-53 consists of TL-50, TL-51 and two TL-45s.

Patent No. 4502315

Model WC-5




This wheel chock provides safe, secure holding for large trucks with heavy loads. Teeth on the bottom grip on all surfaces. Ridges on the face apply downward pressure to prevent sliding. Heavy-duty aircraft aluminum. Handgrip for easy handling.

Model TL-20



Fits all Bulldog style $1\frac{7}{8}$ ", 2" and $2\frac{5}{16}$ " trailer couplers and similar styles. Place slanted side toward front of the coupler. Insert $\frac{3}{4}$ " steel pin and attach your padlock.

Model TL-70

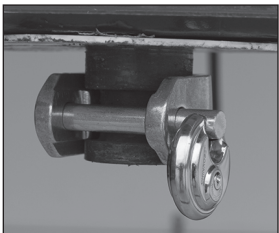

Fits all King Pin couplers for travel trailers and tractor trailers. Place U-shaped lock around King Pin and insert $\frac{3}{4}$ " steel pin. Attach your padlock.

Model TL-60



Fits all Pintle Drawbar Eye couplers sizes $2\frac{1}{2}$ " and 3" inside diameter. Top and bottom of lock are the same. Put one disc on top and one on bottom of eye. Insert $\frac{3}{4}$ " steel pin and attach your padlock.

Patent No. 417133


Model TL-45



Large padlock fits all Blaylock coupler locks.

Padlocks not included with brackets

Model TL-33 Universal

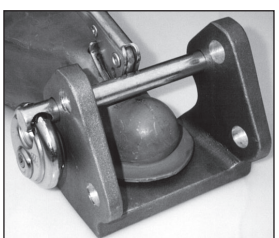

Use this guide to determine what pin position to use for your particular trailer. Simply position the pin at the number on the lock to fit your coupler.

Patent No. D4360645

Position #1


Fits all trigger style: Fulton, Shelby, Dutton-Lainson, Atwood – about 30 couplers.



2,000 lb Trigger Style



Fulton 5,000 lb 2"



Fulton Handwheel U-Haul




Shelby 5,000 lb 2"



Shelby Heavy Duty A-Frame 10,000 lb $2\frac{5}{16}$ "




Atwood Latch Style 8,500 lb $2\frac{5}{16}$ " (latch must be raised)

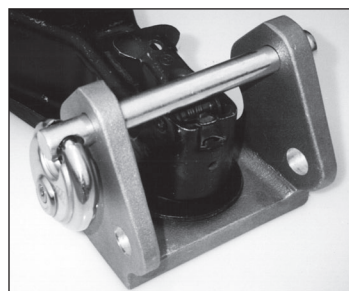


Position #2


Fits latch style: Atwood and similar. Most secure lock made for a latch coupler. Fits Croft and Wallace Yard Dog 2" & $2\frac{5}{16}$ ".



Atwood 5,000 lb Latch Style




U.F.P.

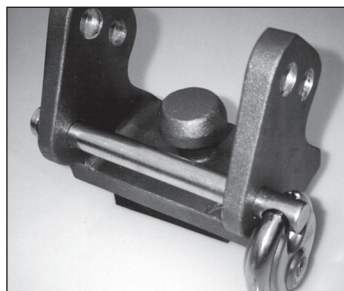

Position #3

Fits large 8,000 and 10,000 lb. Atwood couplers used on many cargo style trailers.



Atwood 10,000 lb $2\frac{5}{16}$ " No. 88007



Atwood 8,000 lb 2" No. 88555

EZ LOCK & ACCESSORIES INSTALLATION & INSTRUCTIONS



Model EZ-300 & EZ-302



Lifetime Warranty
Patent No. D513,975

To install on your wheel, simply open EZ Wheel Lock to widest setting and clamp around the wheel. Push handles together to tightest setting and insert pin through the aligned holes. Insert lock. Install lug nut lock onto wheel to be locked.

EZ-300 (medium)
Fits 13-15" wheels

EZ-302 (large)
Fits 15-20" wheels



Model EZ-200



For use with pickups, SUVs and Gooseneck hookups. Using the EZ Hitch Guide is as easy as 1-2-3.


6" Convex Mirror

Stainless Steel Mast telescopes from 15" to 45"

Strong Magnetic Base

Patent No. D508,883

Model TL-22, TL-23

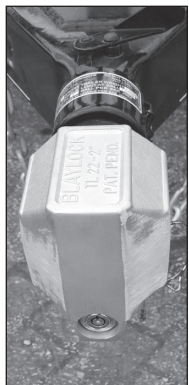

Patent No. D575,684



TL-22 - Fits 2" Bulldog-style couplers
TL-23 - Fits 2 5/16" Bulldog-style couplers

Slide lock over front of coupler, with tumbler unlocked and pin in the down position. Push the steel pin up from the bottom, then engage the lock. The key cannot be removed in unlocked position. The tumbler locks at 12 o'clock position.

Model EZ-100



In most cases simply place the EZ Jack®, rocker side up, under the good tire. Drive up the rocker until the tire to be serviced has cleared the ground. For trailers with low fenders, EZ Jack can be used in the reversed position, with the rocker side down for 2 inches additional height. In either position, once the tire has been changed, simply drive carefully off the low end of the EZ Jack.


EZ Jack also functions as an excellent wheel chock in the reversed position. It is designed to provide a firm hold on just about any surface. It is ideal for parking your trailer or chocking on inclines.

EZ Jack also serves as the perfect solution for leveling recreational vehicles. Its light weight and one-piece design make storage a snap.

Lifetime Warranty




Models TL-34, TL-36 & TL-38

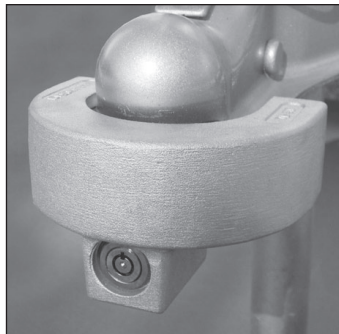

These locks fit all lip-engaging, trigger-style couplers sizes 1 7/8", 2" and 2 5/16" made by Fulton, Shelby, Atwood, Dutton-Lainson and similar models from light-duty to 10,000 lb. (old Marvel-style) couplers.

Made from heavy-duty aircraft aluminum, these locks will not rust. The push-button lock secures the hardened plated steel pin.


Fits Couplers: TL-34 - 2 5/16" 10,000 lb, TL-36 - 2" Heavy Duty 8,000 lb & 2" Medium Duty, TL-38 - 1 7/8" & 2" Light Duty

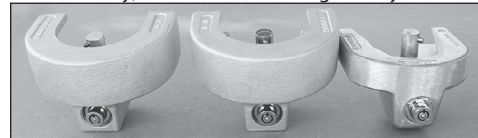

Patent No. D506,121

- Built-in push-button lock encased in heavy-duty aircraft aluminum with extra-large crown tohouse tumbler.
- Strong heat-treated steel pin 5/8" diameter extends to the top of hitch ball hole for secure hold.
- Two keys are included.

Model DL-80

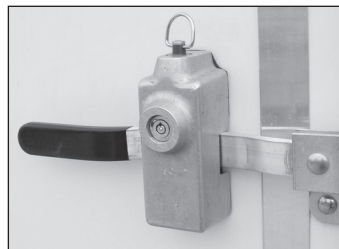


Patent No. 7,210,316

The Model DL-80 lockrod cam and keeper lock will secure most rear doors and front personnel doors, and fits on both vertical and horizontal lockrods.

To install the DL-80, position the cover over the lockrod and insert the pin through the two keeper holes on the lockrod. Then press the push-button lock.

To remove, unlock the push-button lock tumbler using the key. Pull the pin out by the ring. The pull ring is designed to break loose if forced.

The pull ring can be used to hang the DL-80 for storage when not in use.



INSIDE VIEW

STORAGE VIEW